

ARKANSAS STATE HIGHWAY & TRANSPORTATION DEPARTMENT
EQUIPMENT AND PROCUREMENT OFFICE
LITTLE ROCK, ARKANSAS


December 2, 2005

NOTICE TO BIDDERS
ADDENDUM

CONTRACT NO. H-06-035H

OPENING DATE: December 13, 2005

Contract H-06-035H was advertised with incorrect specifications. The correct specifications have been attached to this addendum. These revised specifications will supercede all prior specifications for this bid and award will be justified accordingly.

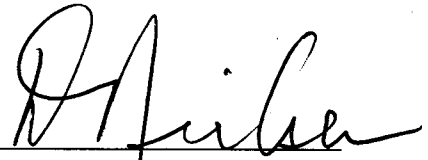

Doug Nielsen, Division Head
Equipment and Procurement

ARKANSAS STATE HIGHWAY AND TRANSPORTATION DEPARTMENT

SPECIFICATION 06-64-6049

FOR

COMPACT PICKUP TRUCK

EXTENDED CAB

(Revised 12-02-05)

1. GVWR: No less than 5,000 pounds.
2. Wheelbase: Minimum of 125", maximum of 132".
3. Engine: *Minimum piston displacement of 3.5 liters* equipped with full flow oil filter, dry type air cleaner, maintenance free battery with a minimum rating of 500 cold cranking amps at 0° F and not less than 95 amp alternator.
4. Cooling: As regularly furnished by manufacturer with anti-freeze protection to -20° F, or lower.
5. Transmission: Automatic, with a minimum of four (4) forward speeds.
6. Steering: Hydraulic actuated power steering as regularly furnished by manufacturer.
7. Front Axle: Independent suspension or I Beam type axle. Capacity of front axle and suspension shall be as recommended by manufacturer for vehicle to meet or exceed GVWR specified above.
8. Rear Axle: Semi-floating hypoid type with a ratio of 3.42 or 3.55 to 1. (Alternate ratio may be provided if approved by AHTD prior to delivery.) Capacity of rear axle and suspension shall be as recommended by manufacturer for vehicle to meet or exceed GVWR specified above.
9. Brakes: Power with four wheel anti-lock. Front to be disc.
10. Cab: Four (4) Door Extended Cab complete with insulation and all standard interior trim, dual electric intermittent windshield wipers with washers, factory installed fresh air heater-defroster unit, factory installed electronic AM/FM radio, floor covering consisting of manufacturer's standard materials and colors, right and left sun visors, key lock on front doors, inside rear view mirror and right and left side exterior mirrors.
11. Seating: To be equipped with front and rear seats. Front seats may be split bench style or individual driver's and passenger's bucket seats. Rear seat/s shall be forward facing, folding type with seating capacity for at least two (2) passengers. Upholstery to consist of manufacturer's standard materials and colors for model and trim level provided. Seat belts shall be provided for all seating positions.
12. Air Conditioning: Shall be equipped with factory installed air conditioning and include tinted glass.
13. Tilt Steering Column: Factory installed.
14. Speed Control: Automatic speed control (may be dealer installed, but of same manufacturer as vehicle).
15. Body: All steel wide type pickup body no less than 72" in length inside, complete with tail gate.
16. Wheels: Five (5) 15" or 16" diameter, no less than 5.50" rim section.
17. Tires: Five (5) all season steel belted radial no less than P205/75R15, P225/70R15 or P245/70R16, B load range.
18. Fuel Tank: Minimum fuel capacity of 19 gallons.
19. Lights: Dual beam headlights, parking lights, self canceling directional turn signals with hazard flasher switch, back up lights and side marker lights. Rear lights to consist of stop and tail lights in addition to directional signals.
20. Equipment: Front and rear bumpers (rear bumper to be heavy duty step type with hitch plate and license plate light), rear license plate bracket, front and rear shock absorbers, spare tire carrier as regularly furnished by manufacturer, hub caps, jack and lug wrench.
21. Keys: Minimum of three (3) ignition/door keys per vehicle.
22. Color: Sherwin Williams F8W2030 Frost White Acrylic Enamel, or equal. Front and rear bumpers, grill, mirrors, wheels and hub caps as regularly furnished by manufacturer.