

ARKANSAS STATE HIGHWAY & TRANSPORTATION DEPARTMENT  
EQUIPMENT AND PROCUREMENT OFFICE  
LITTLE ROCK, ARKANSAS

February 22, 2006

NOTICE TO BIDDERS  
ADDENDUM

BID NO. M-06-145H

Articulated Hydraulic Boom Mower, Tractor Mounted

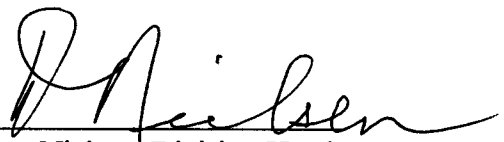
OPENING DATE: March 7, 2006

**Specification item 2-I read:**

Hydraulics: Hydraulic pump for tractor hydraulics shall have a minimum capacity of 17 gpm at approximately 2,500 psi. Hydraulic pump for operating hydraulic driven cutter shall be front mounted, driven from front of engine crankshaft, with a minimum capacity of 44 gpm at approximately 2,500 psi. Hydraulic oil reservoir for cutter shall have a minimum capacity of 60 gallons. Reservoir to be mounted on left side of tractor to help act as a counterweight to the boom assembly and cutter attachment.

**Specification item 2-I should have read:**

Hydraulics: Hydraulic pump for tractor hydraulics shall have a minimum capacity of 16.5 gpm at approximately 2,500 psi. Hydraulic pump for operating hydraulic driven cutter shall be front mounted, driven from front of engine crankshaft, with a minimum capacity of 44 gpm at approximately 2,500 psi. Hydraulic oil reservoir for cutter shall have a minimum capacity of 60 gallons. Reservoir to be mounted on left side of tractor to help act as a counterweight to the boom assembly and cutter attachment.

  
Doug Nielsen, Division Head  
Equipment and Procurement