



DATE ISSUED	DATE REVISED	DATE FILMED	DATE REVISED	DATE FILMED	FED. ROAD DIST. NO.	STATE	FED. AID PROJ. NO.	SHEET NO.	TOTAL SHEETS
10/18/96		10/18/96			6	ARK.			
	10/24/02								
	04/10/03								
① TEMP. BRIDGE									2466

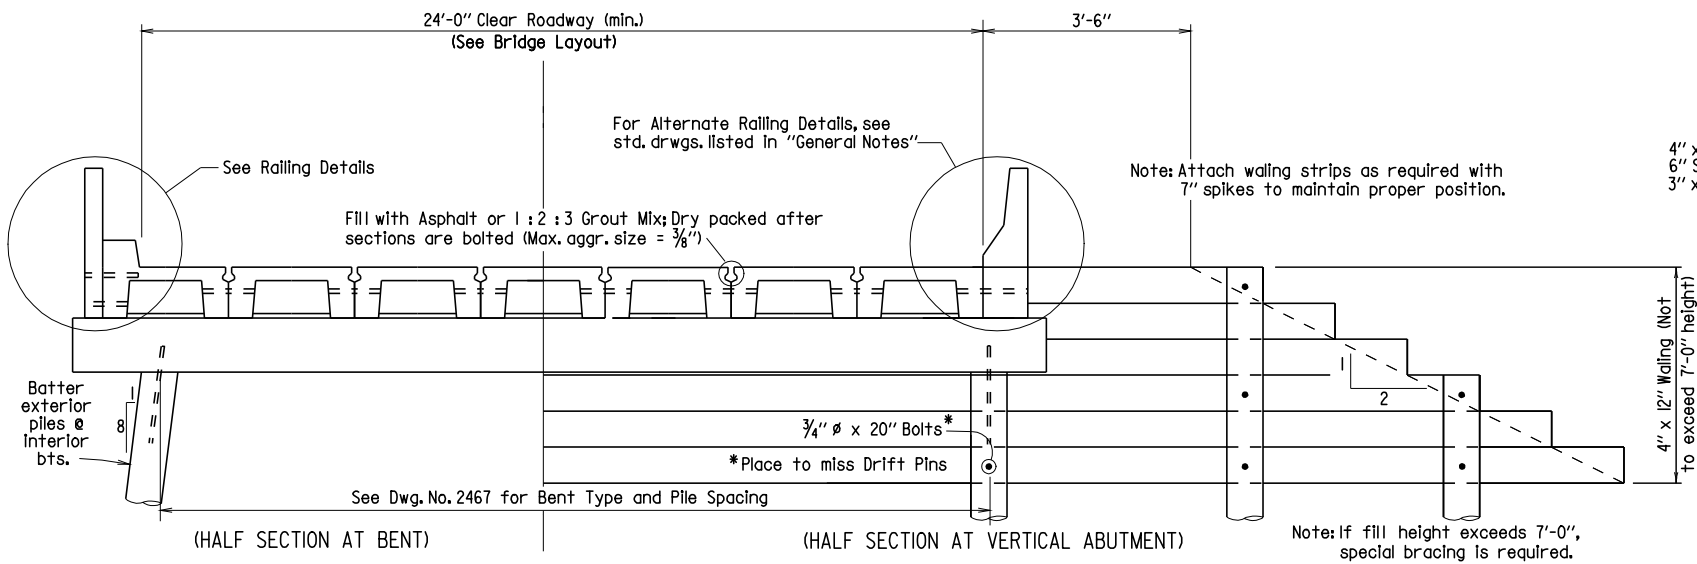

**TYPICAL ROADWAY SECTION**


**RAILING DETAILS**

- GENERAL NOTES**
- △ DESIGN SPECIFICATIONS: AASHTO Standard Specifications for Highway Bridges, 2002 Edition, with current interim specifications.
  - △ CONSTRUCTION SPECIFICATIONS: Arkansas State Highway and Transportation Department Standard Specifications for Highway Construction, 2003 Edition, with applicable special provisions and supplemental specifications.
- SEISMIC PERFORMANCE CATEGORY: A
- DESIGN LIVE LOADS: HS-44 (No Overload).
- DESIGN DEAD LOADS: 50 lbs. per cu. ft. for lumber  
150 lbs. per cu. ft. for concrete
- Precast Concrete Units shall comply with the requirements of AHTD standard drawings and special provisions. Drawings for old style units are within the drawing series 5291 thru 5307 and 14800 thru 14899. New style units (Current Design) are within the drawing series 15190 thru 15400.
- Load Factor Design is used for the new style precast concrete units. Allowable Stress Design is used for the old style precast concrete units and timber components. The allowable unit stresses used assume normal duration of loading for stress grades of sawn lumber and are as follows:
- fb=1200 psi  
fv=85 psi

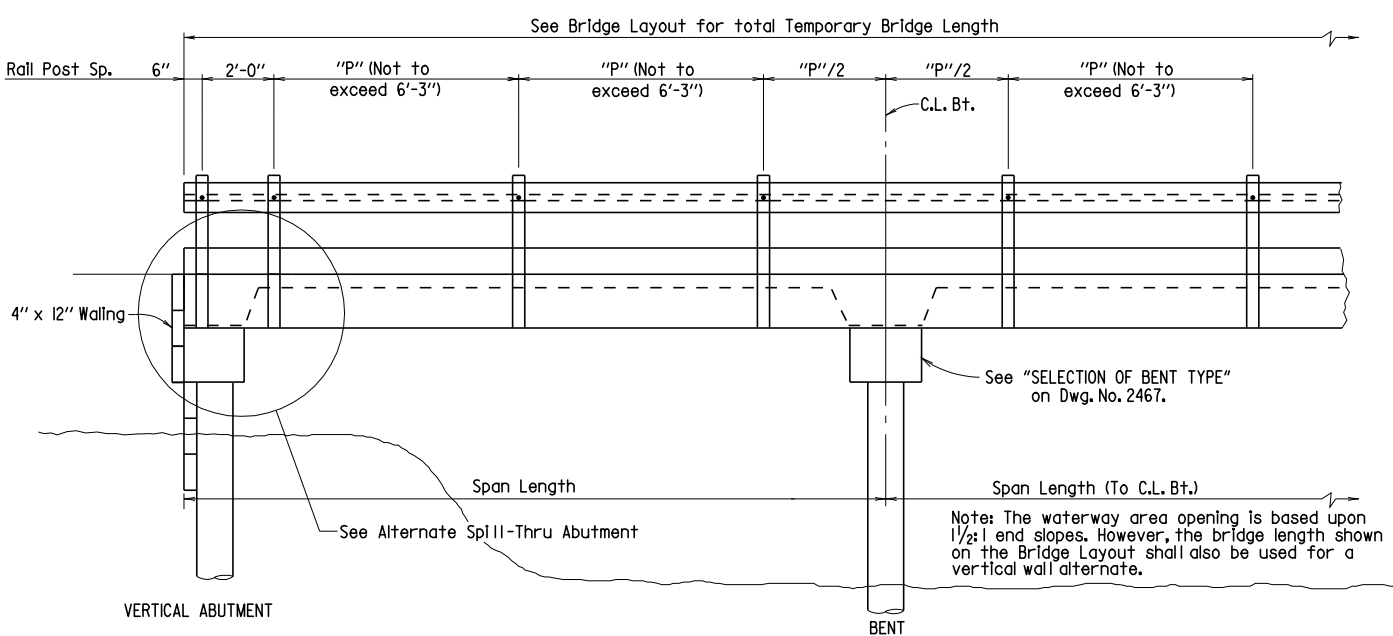


**LONGITUDINAL SECTION**

**ALTERNATE SPILL-THRU ABUTMENT**

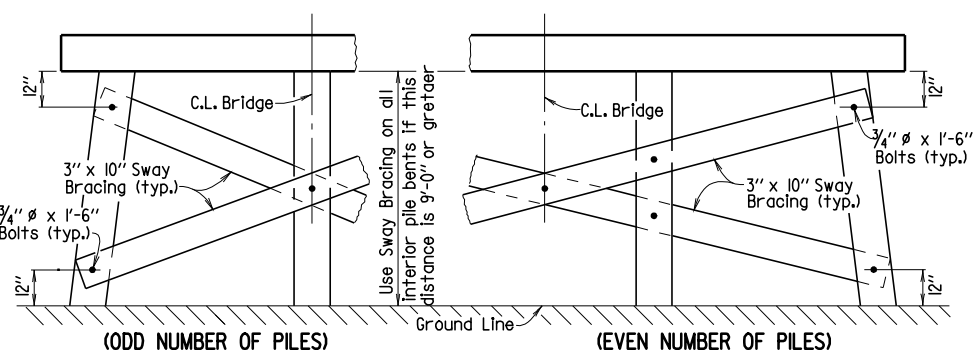

**DETAILS OF SWAY BRACING FOR TIMBER PILES**

Note: Sway Bracing, if required, shall be used on both lines of piles for Tower Bents.

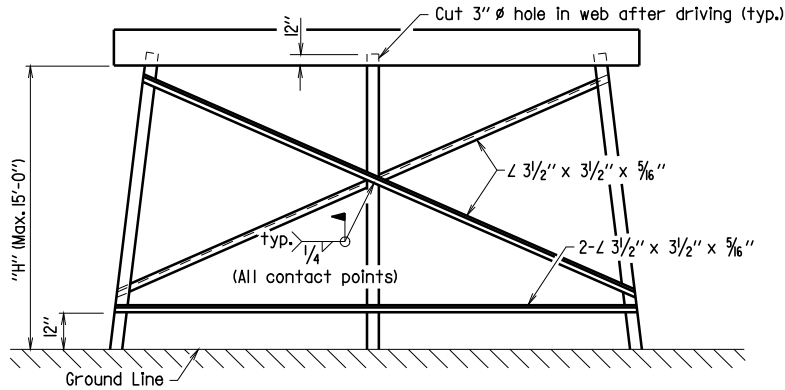


**DETAILS OF BRACING FOR STEEL PILES**

Note: All bracing shall be cut and welded in the field. Each brace shall be furnished in one piece. Payment for any bracing required shall be considered incidental to Item 603 "Temporary Bridge Structure".

Omit bottom bracing where "H" is less than 10'. Omit all bracing where "H" is less than 5'.

- △ Concrete shall be Class S with a minimum 28 day compressive strength  $f'c = 3500$  psi unless otherwise noted.
- △ Reinforcing Steel shall conform to AASHTO M 31 or M 53, Grade 60 unless otherwise noted.
- △ Structural Steel shall be AASHTO M 270, Grade 36 unless otherwise noted.
- △ Timber piling shall comply with Section 818 of the Standard Specifications and shall be driven to a minimum bearing capacity of 20 tons per pile. Steel piling shall be HP12X53 and shall be driven to a minimum bearing capacity of 44 tons per pile.
- △ Malleable or cast iron washers shall be used under all bolt heads and nuts bearing on timber. Standard washers shall be provided under all bolt heads and nuts in connection with concrete.
- △ Bolts shall conform to the requirements of ASTM A 307. Minimum dimensions are shown for bolts, dowels, and drift pins.
- △ Grout placed around Drift Pins in piles shall be allowed to cure for 72 hours before caps are used to support the superstructure. Grout to consist of one part portland cement to two parts sand.
- △ Melted sulfur may be used in lieu of grout placed around drift pins. The superstructure may be placed as soon as the sulfur has hardened.
- △ Bent caps to be handled from points approximately 5' from the ends.
- △ Timber material, regardless of species, must be of equal or better strength than no. 2 southern pine or douglas fir, graded by the standard grading rules. All timber widths and thicknesses are shown as nominal.
- △ For additional notes concerning "Bridge End Protection System", see Dwg. No. 2465.
- △ Unless otherwise noted, the Temporary Bridge Structure shall comply with and be paid for in accordance with Section 603.

- △ Revised Reinf. Stl. to Grade 60, Updated the SEAL jxj 10-24-02 Ck'd by: MEC 10-24-02
- △ Revised for 2002 AASHTO Design Specifications and 2003 AHTD Construction Specifications. CRE 04-10-03 Chk'd by: CJF 04-10-03



**SHEET 1 OF 2**  
**DETAILS OF**  
**STANDARD TEMPORARY BRIDGE STRUCTURE**  
**PRECAST CONCRETE SPANS**  
**24'-0" ROADWAY WIDTH**  
**ROUTE SEC.**  
**ARKANSAS STATE HIGHWAY COMMISSION**  
**LITTLE ROCK, ARK.**

DRAWN BY: MJT DATE: 10-18-96  
 CHECKED BY: GEC DATE: 10-18-96 SCALE: NO SCALE  
 DESIGNED BY: Std. DATE: \_\_\_\_\_  
 BRIDGE NO. \_\_\_\_\_ DRAWING NO. 2466